

Heavy Duty Aluminum Adjustable Torque Wrench new

Industrial application

Lightweight and robust; housing made by aluminium alloy


Multi-lever mechanism brings length independence and accurate torque

Loud click sound and string impulse when torque value reached

Easy lock and adjustment design

Tolerance of torque $\pm 3\%$

Quality accords to DIN ISO 6789 & ASMEB 107.300-2010

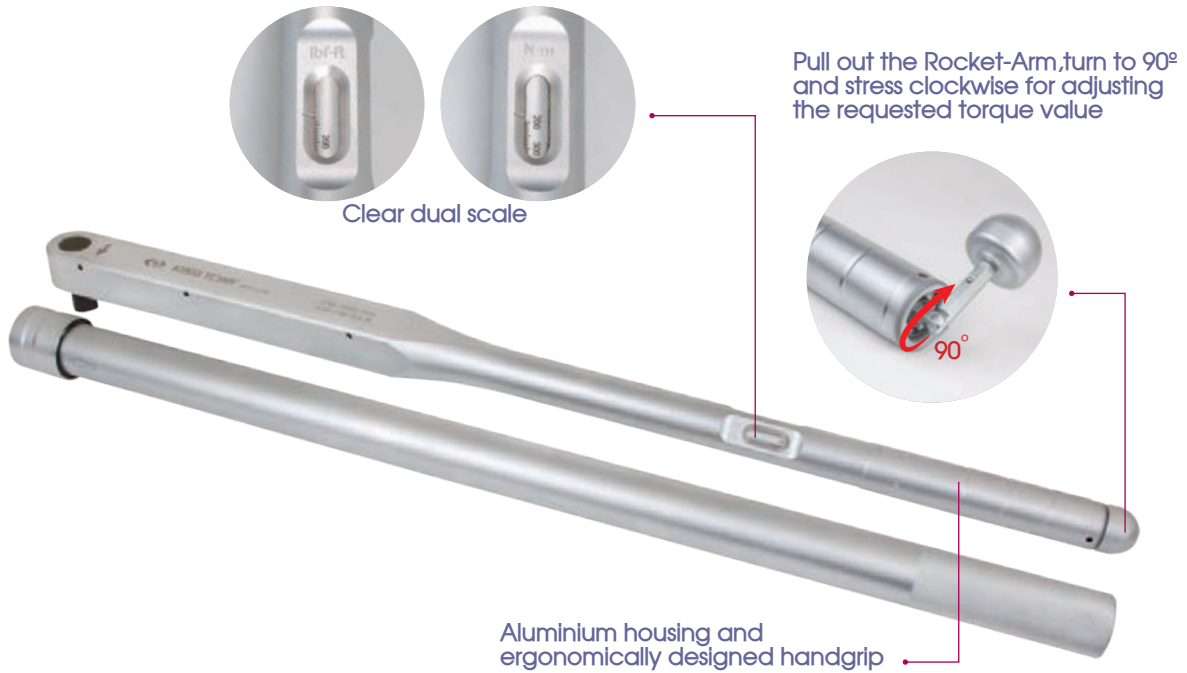

Step:



Dual Scale - English & Newton Meter (ft. lb. & Nm)

KT NO.	Square drive	Torque range				Overall length mm		
		Nm	incr.	ft.lb.	incr.			
3445G-1FB	1/2"	40~200 Nm	5	30~150 ft.lb.	5	555	1500	1 / 12
3465G-1FB	3/4"	110~550 Nm	10	80~400 ft.lb.	10	820	3000	1 / 2
3465G-2FB	3/4"	140~760 Nm	10	100~560 ft.lb.	10	820	3000	1 / 2
3465G-3FB	3/4"	200~1000 Nm	10	140~740 ft.lb.	10	820	3000	1 / 2
3485G-1DB	1"	600~1500 Nm	25	-	-	1615	10900	1 / 1
3485G-2DB	1"	750~2000 Nm	50	-	-	2370	11700	1 / 1