


Electronic Torque Wrench



- Electronic torque value readout
- Peak and trace mode selection
- Angle accuracy (34387/34487)
- Buzzer and LED indicator for presetting target torque
- Engineering units (N·m, ft·lb, in·lb, kgf·m) adjustment
- Switch off automatically after 60 seconds
- DIN ISO 6789:2017 & ASME B107.300-2010
- CW ± 2% and CCW ± 2.5% operation




Electronic Torque Wrench (34367-2AG, 34467-1AG)

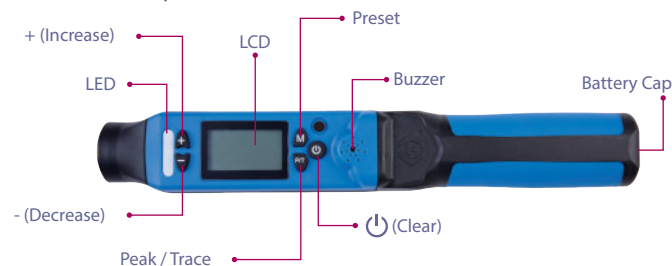


Torque Accuracy	CW ± 2% / CCW ± 2.5%
Preset Function	10
Display Resolution	0.1 N·m/ ft·lb , 1.0 in·lb, 0.01 kgf·m
Operation Mode	Peak/Trace
Battery	AAAx3
Backlight	Yes (Negative)
Alert	LED & Buzzer
Operating Ambient Temperature	-10°C ~ 60°C
Storage Temperature	-20°C ~ 70°C
Operation Relative Humidity	15 to 90% noncondensing

Electronic Torque Angle-controlled Wrench (34387-2AG, 34487-1AG)

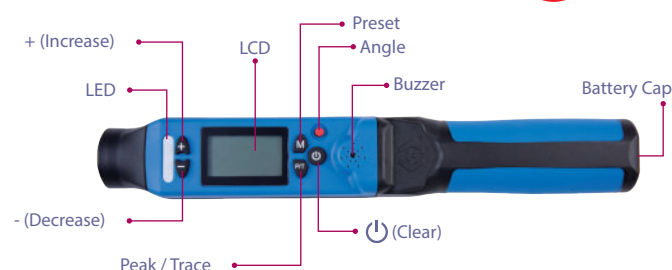

34387-2AG / 34487-1AG :

Angle Accuracy	(± 1% of reading)+(± 1% angular velocity > 10°/sec < 180°/sec)
Angle Range	0-360°
Angle Preset	1



Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / in·lb / ft·lb & kgf·m)

KT NO.	Gear teeth	Square drive	Torque range				Overall length mm	g	/ /
			N·m	in·lb	ft·lb	kgf·m			
● 34367-2AG	72	3/8"	27-135 N·m	239~1195 in·lb	19.9-99.6 ft·lb	2.75~13.76 kgf·m	460	1400	3 / 6
● 34467-1AG	36	1/2"	40-200 N·m	354~1770 in·lb	29.5-147.5 ft·lb	4.08~20.38 kgf·m	530	1500	3 / 6
● 34387-2AG	72	3/8"	27-135 N·m	239~1195 in·lb	19.9-99.6 ft·lb	2.75~13.76 kgf·m	460	1400	3 / 6
● 34487-1AG	36	1/2"	40-200 N·m	354~1770 in·lb	29.5-147.5 ft·lb	4.08~20.38 kgf·m	530	1500	3 / 6