

Power Driving

- Chrome vanadium & stainless alloy steel
- Anti-rust oiled , sand-blasted
- Magnetic

752

- Magnetic bit holder
- 2 PC. type
- With quick-release sleeve
- DIN 7427



KT NO.	inch	Overall length (mm)		
752-60	1/4	63	33	6 / 72
KT NO.	inch	Overall length (mm)		
752-75	1/4	75	32	1 / 20
752-100	1/4	100	38	1 / 20
752-150	1/4	150	52	1 / 20
752-300	1/4	300	92	1 / 20

753

- 753-63
- Magnetic bit holder
- 2 PC. type
- With quick-release sleeve
- For 1025 bit
- DIN 7427



KT NO.	inch	Overall length (mm)		
753-63	1/4	63	33	6 / 72

753A

- 753A-370
- Quick release bit holder
- Extra-long extended driver for limited space
- Magnetic bit holder
- For power bits



KT NO.	inch	Overall length (mm)		
753A-370	1/4	370	170	1 / 4

1/4" Hex size shank driver

754

- Universal joint bit holder
- 20 degree pivot mode allows for limited space accessibility
- Can be used in straight or pivot mode



KT NO.	inch	Overall Length (mm)		
754-90	1/4	90	52	1 / 20

755

- Quick release flexible bit holder
- Flexible shaft driver
- The flex shaft accepts any standard hex fitting
- Quick release fits double end power bits and 50mm power bits



KT NO.	inch	Overall length (mm)		
755-300	1/4	300	293	1 / 6
755-400	1/4	400	385	1 / 12


Angle Driver

- The body is zin alloy steel
- The arm is chrome vanadium alloy steel
- The chuck is aluminum alloy steel
- Magnetic

1/4" Hex size shank driver

759

- Heavy duty right angle bit holder
- This heavy duty 90 degree offset driver with 24 position gripped stabilizer arm is designed for use with power drivers 18-24 Volts
- Its head is shorter than 2.5" which is suitable to use in limited space
- Locking magnetic chuck accepts any 1/4" hex drive accessory such as twist drills, spade drills, step drills, grinding stones, buffer pads, nut drivers and screwdriver bits
- Durable all metal housing and steel gears with ball bearing construction
- Gripped stabilizer arm with 1 screwdriver bit storage
- It's amazing capacity for up to 500 inch lbs with 2000 RPM

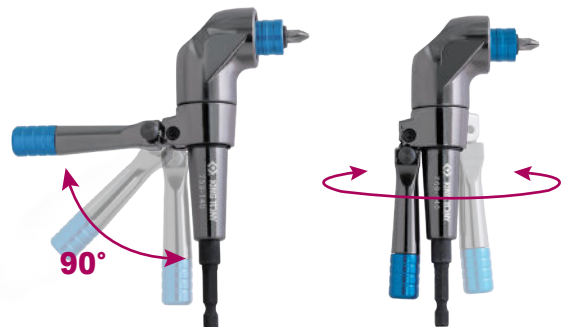

KT NO.	inch	Overall length (mm)		
759-140	1/4	140	305	12 / 48

