

Torque Screwdriver


34111

- Suitable for 1/4" Hex insert bit; 1/4" socket
- Automatic adjustment knob design
- Easy-to-read laser scale
- Ergonomic comfort rubber grip
- Tolerance of torque $\pm 5\%$ (CW)
- Quality meets DIN ISO 6789:2017 & ASME B107.300-2010



- Tolerance of torque within $\pm 5\%$ (CW)

34211

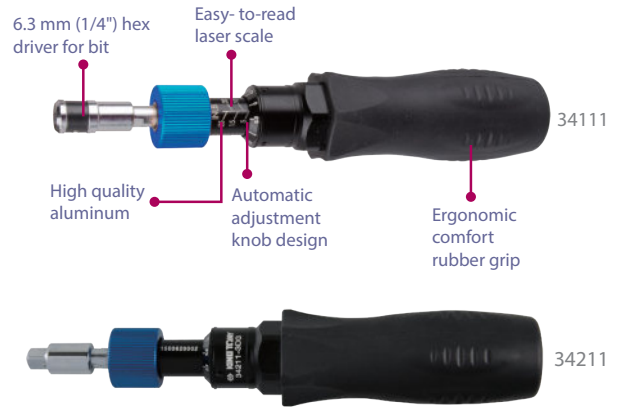

KT NO.	1/4"DR.	Torque range cN-m / N-m / in-lb	Incr.	Overall length mm		
34111-1DG		30~120 cN-m	1 cN-m	180	207	1 / 24
34111-1EG		3~15 in-lb	0.1 in-lb	180	207	1 / 24
34111-2DG		1.5~6.5 N-m	0.1 N-m	196	475	1 / 24
34111-2EG		10~50 in-lb	1.0 in-lb	196	475	1 / 24
34211-3DG		4~9 N-m	0.1 N-m	196	475	1 / 24

Torque Angle Gauge

34440

34440A


34660

34660A


- Square Drive :
34440 (1/2" x 1/2")
34660 (3/4" x 3/4")
- 360° angle scale- clearly marked in 2° increments, and in intervals of 10° and 30°
- Indicator etched on clear plastic plate, protects angle scale from dirt and grease
- Adjustable arm keeps angle scale stationary
- Arm has two lengths for additional flexibility in placement against components
- Tough composite dial and rotating index allow operator to accurately tighten to meet standard



- Step 1 : Set up the torque value by torque wrench



- Step 2 : Adjust the angle by angle gauge

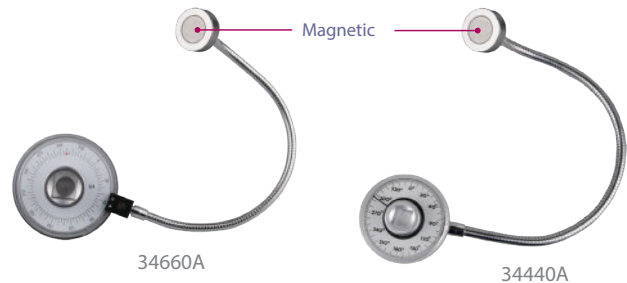

KT NO.	Spec.		
34440	1/2"F x 1/2"M	190	12 / 48
34440A	1/2"F x 1/2"M	375	6 / 24
34660	3/4"F x 3/4"M	666	6 / 12
34660A	3/4"F x 3/4"M	908	6 / 12

